

# Badger™

Mobile fall arrest systems  
Meets OSHA Requirements  
1910.29(d) and 1926.502(d) (15) and  
(16)



## Features:

- Wheelbarrow like maneuverability
- Two workers in restraint and two in arrest
- Hardened steel penetrating claw for arrest
- Integrated fork tine pockets and lifting eyes
- Flat free tires
- Rubber padded base to protect rooftops



## OSHA Compliant

The Badger is an OSHA compliant mobile anchor point that can protect four workers at a time; two in fall arrest and two in restraint. It's the perfect solution for jobs that require tight maneuverability, low weight. Designed to effortlessly fit in elevators with openings of 40 inches or more and easily transportable in the bed of a truck.

## Compatible With Most Roofs

In the event of a fall, the hardened steel claw deeply penetrates into built-up roofs, TPO, ISO EPDM and 20 and 22 -gauge steel decks to anchor the cart into place and prevent workers from falling. For concrete applications, the Cobra Cart™ is used.

## Best Value

The Badger cart is one of the lightest 4-person (2-person fall arrest, 2-person restraint) mobile tie off point in the industry at 625 lbs. It can be quickly deployed where it is needed. The wheelbarrow design enables best in class maneuverability. It is small and compact, for tight spaces and takes up less storage than competing designs.

## Why Choose Garlock?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- 100+ Years of Industry Experience
- Full Passive Fall Prevention Portfolio
- Custom Engineered Products Available

# Features




Light, maneuverable and compact design requires only 66lbs to move.



Hardened steel claw for superior penetration and holding power.



18x8.5 Flat Free tires standard to eliminate punctures and roll over rocks with ease.

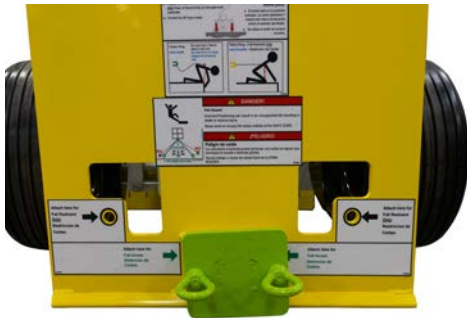

Two person restraint and two person arrest simultaneously.



Hoisting points on each corner with fork truck pockets.



Seamless transition between transport and storage modes.

# Specifications

Part Number	462-001-001
Worker capacity	Two person restraint and two person arrest simultaneously
Allowable substrates	Built-up roofs, TPO, ISO, EPDM, PVC and 20 and 22 -gauge metal decks. Restraint only on Concrete decking
Finish	Powder coated safety yellow
Weight	625 lbs.
Length	58" transport mode, 44" storage mode
Width	40"
Height	44" transport mode, 48" storage mode
Country of origin	USA

Due to continuous improvement, specifications are subject to change without notice.